










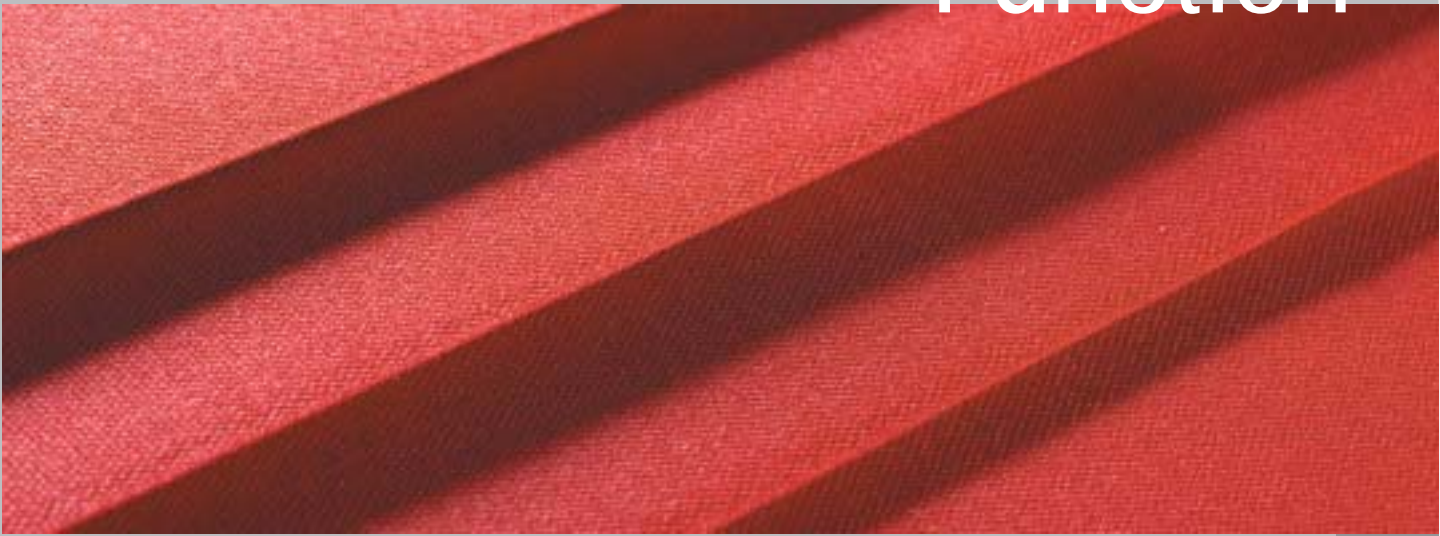






# Function



# Function

Gewebe	DIN 60 001		100% Polyester
Flächengewicht (g/m <sup>2</sup> )	DIN EN 12127		275
Gewebedicke (mm)	DIN ISO 2286-3		0.47
Lamellenbreiten (mm)			89, 127
Schwerentflammbarkeit			M1 (NF P 92501-7), Klasse 1 (CSE RF 1/75)
Pflegehinweise			

## Solar und Optische Kennzahlen (DIN EN 410) Alle Werte sind Nennwerte mit einer Toleranz von +/- 5%.

Farbe	01	03	04	06	10	12	13	29	31	63
 T <sub>v</sub>	32.28	24.21	10.95	23.21	8.05	22.37	30.43	11.76	5.57	1.79
 R <sub>v</sub>	66.60	59.03	36.28	55.87	28.88	52.75	64.53	35.68	16.61	6.71
 A <sub>v</sub>	1.12	16.76	52.77	20.92	63.07	24.88	5.04	52.56	77.82	91.50
 T <sub>s</sub>	31.44	28.05	22.67	26.41	20.28	24.48	31.23	22.76	19.88	17.62
 R <sub>s</sub>	63.76	62.21	52.30	58.48	46.23	52.32	65.38	50.76	44.44	39.69
 A <sub>s</sub>	4.80	9.74	25.03	15.11	33.49	23.20	3.39	26.48	35.68	42.69
 UV	18.34	15.43	8.77	10.75	5.05	3.94	29.24	7.99	2.82	3.02
 g <sub>tot</sub>	0.39	0.39	0.43	0.41	0.46	0.44	0.38	0.44	0.47	0.49
 F <sub>c</sub>	0.54	0.54	0.60	0.57	0.64	0.60	0.53	0.61	0.65	0.68

 T<sub>v</sub> Lichttransmissionsgrad (%)

 R<sub>v</sub> Lichtreflexionsgrad (%)

 A<sub>v</sub> Lichtabsorptionsgrad (%)


 UV UV-Transmissionsgrad (%)

 F<sub>c</sub> Abminderungsfaktor (pf EN 14501 2005)

 T<sub>s</sub> Strahlungstransmissionsgrad (%)

 R<sub>s</sub> Strahlungsreflexionsgrad (%)

 A<sub>s</sub> Strahlungsabsorptionsgrad (%)

 g<sub>tot</sub> Gesamt g-Wert (Glas g-Wert: 0,72; 1,6 W/m<sup>2</sup> K) DIN EN 13363-1



03



29



04



63



13



12



10



31



01



06